



FRONT ELEVATION

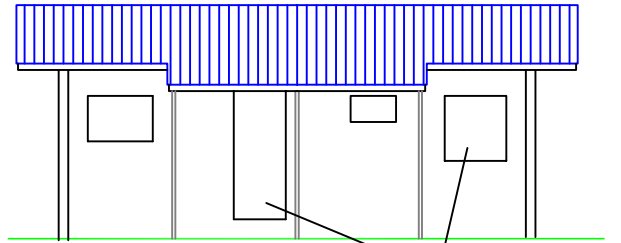



REAR ELEVATION

DOOR & WINDOW OPENINGS

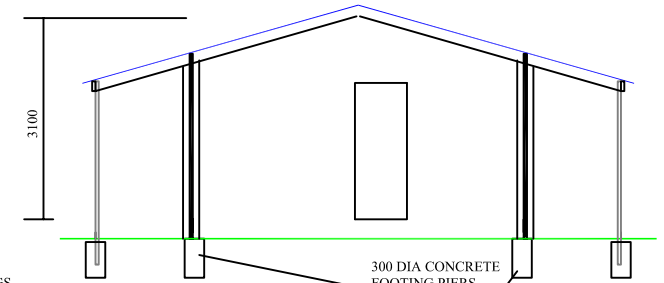


SECTION A


300 DIA CONCRETE FOOTING PIERS INTO HARD CLAY

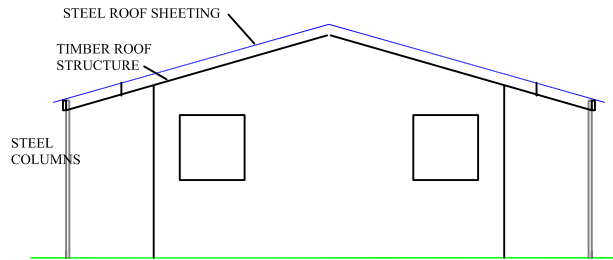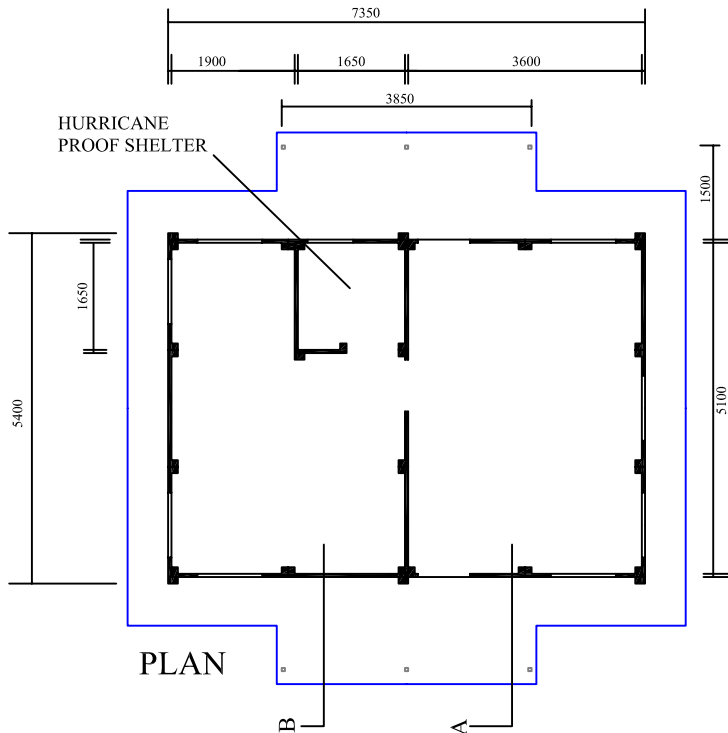

SIDE ELEVATION

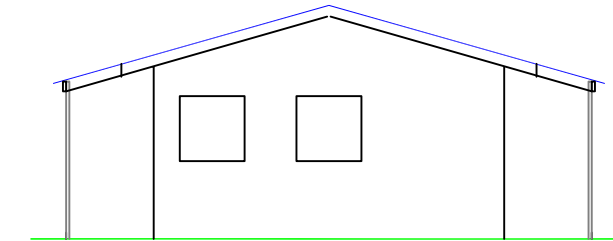

SIDE ELEVATION

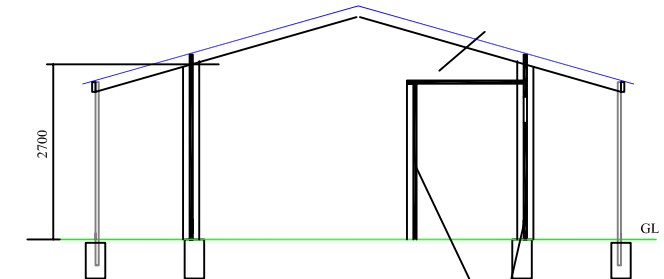

SECTION B

50 MM THICK UNIBUILD WALL PANELS. 65MPA STRENGTH. WATER PROOF. EARTHQUAKE RESISTANT. HURRICANE RESISTANT. HIGH IMPACT RESISTANCE. LOW MAINTENANCE.

HOUSE AREA = 38.2 SQM
VERANDAHS = 14.0 SQM