



FRONT ELEVATION

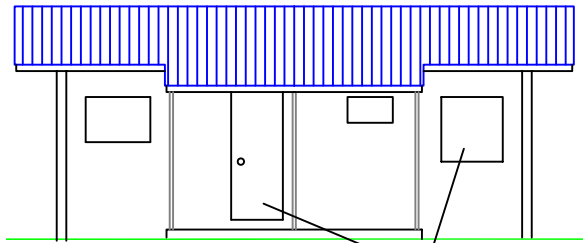



REAR ELEVATION

DOOR & WINDOWS TO CLIENT'S REQUIREMENTS HURRICANE RESISTANT

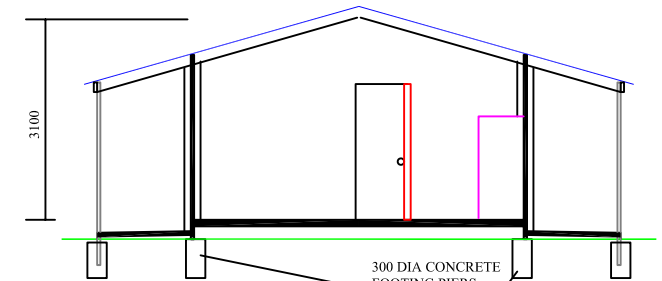

SECTION A

300 DIA CONCRETE FOOTING PIERS INTO HARD CLAY

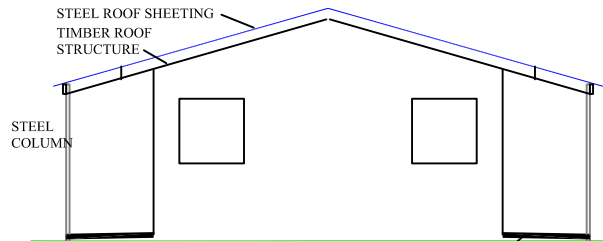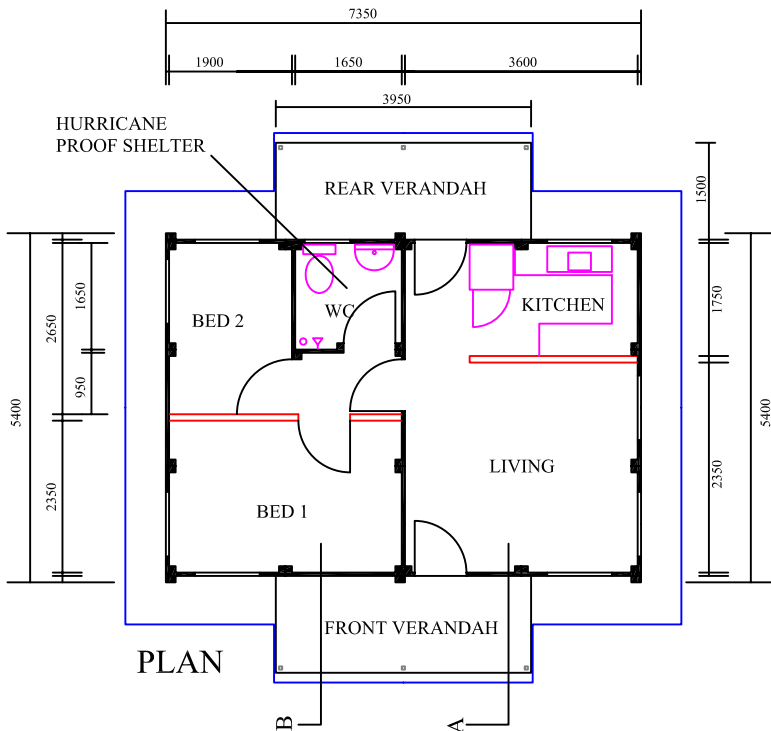


SIDE ELEVATION

STEEL COLUMN

STEEL ROOF SHEETING
TIMBER ROOF STRUCTURE

75MM CONCRETE PORCH

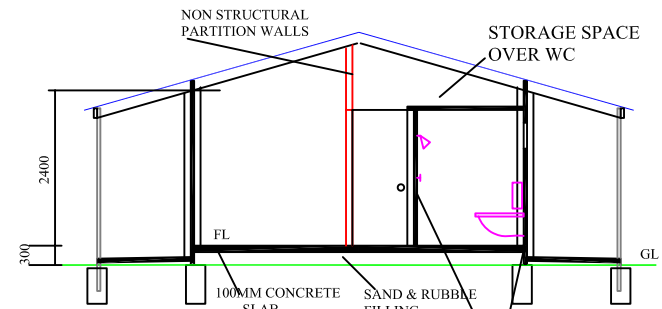

SECTION B

NON STRUCTURAL PARTITION WALLS

STORAGE SPACE OVER WC

2400


FL

100MM CONCRETE SLAB

SAND & RUBBLE FILLING

GL

50 MM THICK UNIBUILD WALL PANELS. 65MPA STRENGTH. WATER PROOF. EARTHQUAKE RESISTANT, HURRICANE RESISTANT. HIGH IMPACT RESISTANCE. LOW MAINTENANCE.

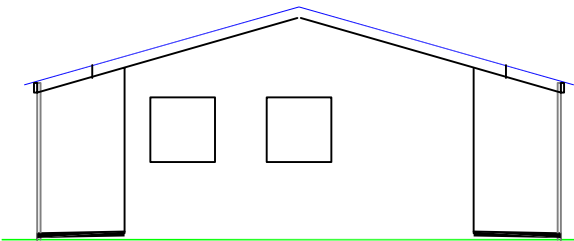

SIDE ELEVATION

TYPICAL DESIGN. MANY VARIATIONS AVAILABLE FOR BOTH FLAT & SLOPING BUILDING SITES.

HOUSE AREA = 38.2 SQM
VERANDAHS = 14.0 SQM