



FRONT ELEVATION

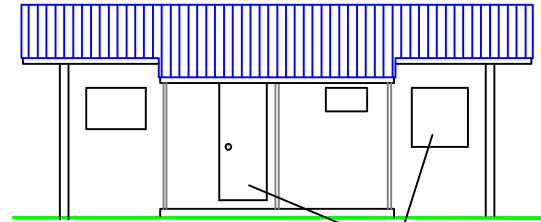



REAR ELEVATION

DOOR & WINDOWS TO CLIENT'S REQUIREMENTS  
HURRICANE RESISTANT

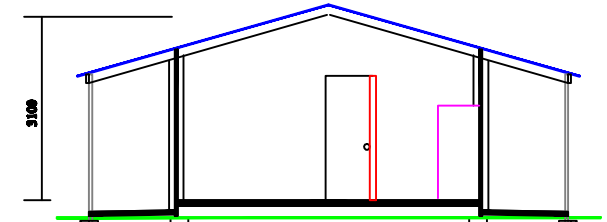


SECTION A


300 DIA CONCRETE FOOTING PILES INTO HARD CLAY

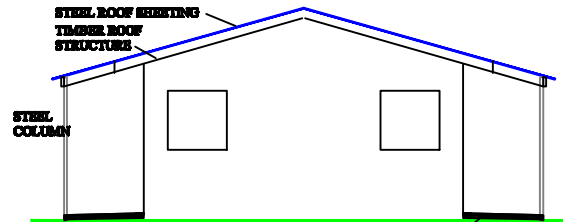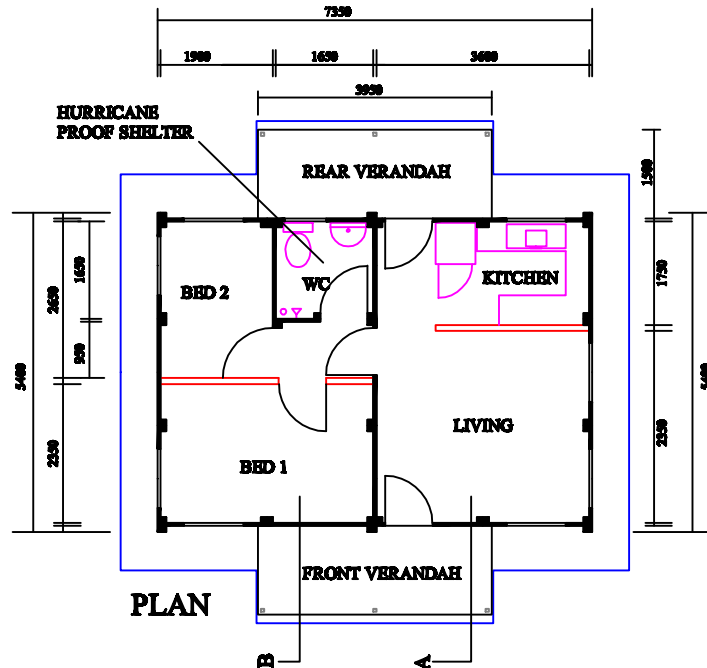

SIDE ELEVATION

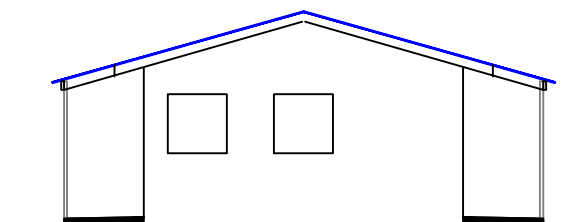

SIDE ELEVATION

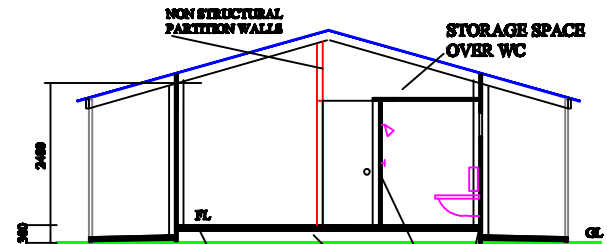

SECTION B

NON STRUCTURAL PARTITION WALLS

STORAGE SPACE OVER WC

FL

100MM CONCRETE SLAB

SAND & VERBEE FILLING

GL

50 MM THICK UNIBUILD WALL PANELS  
600PA STRENGTH, WATER PROOF,  
EARTHQUAKE RESISTANT, HURRICANE  
RESISTANT, HIGH IMPACT RESISTANCE  
LOW MAINTENANCE

TYPICAL DESIGN. MANY VARIATIONS AVAILABLE FOR BOTH FLAT & SLOPING BUILDING SITES.

HOUSE AREA = 38.2 SQM  
VERANDAS = 14.0 SQM