



**SIDE ELEVATION**

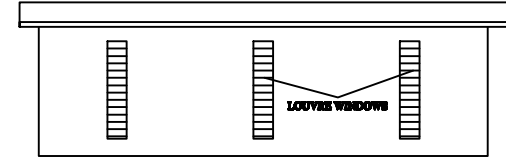


**REAR ELEVATION**

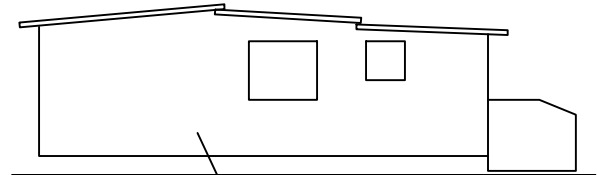


**SIDE ELEVATION**

ALL EXTERNAL WALL, FLOOR & ROOF COMPONENTS MADE FROM 30 MPA FIRE RESISTANT CONCRETE & CONTAIN MIN. 70 MM INSULATION.  
 DISPLAY BUILDING CAN BE SEEN AT UNIBUILD'S FACTORY GOODONVALE.

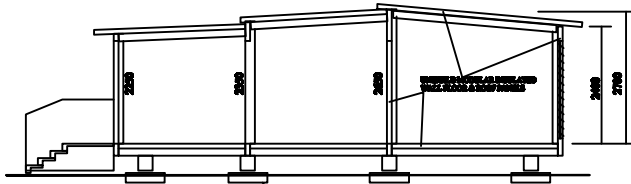

**SECTION A**

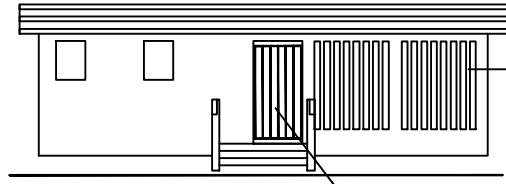


**FRONT ELEVATION**

UNIBUILD SECURITY BREAKWAY WALLS


UNIBUILD SECURITY GATE

800 X 800 X 200 TUBE STEEL PERIMETER BEAMS AND FOOTINGS BUILT ON SITE

300 X 500 MM FLOOR BEAMS, PRECAST CONCRETE ON VALE

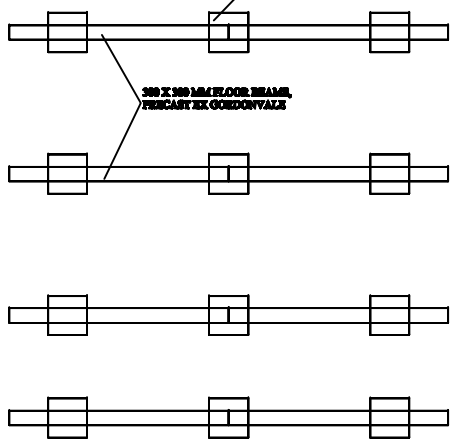

**FOOTING PLAN**

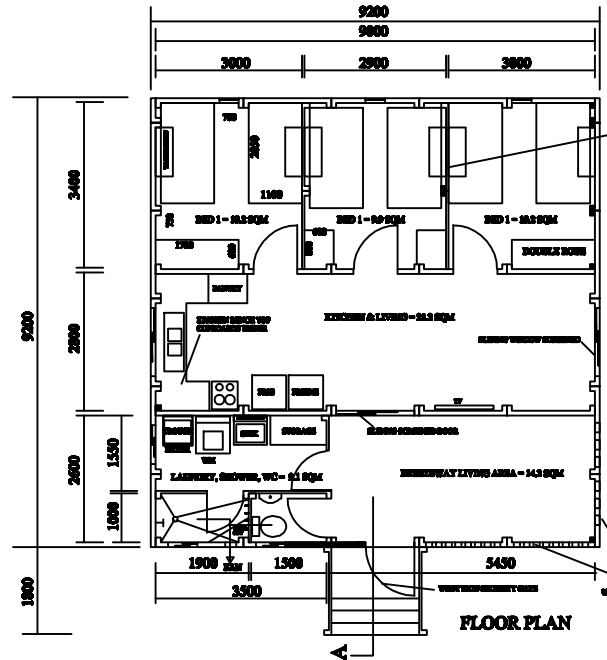

**FLOOR PLAN**

DIVIDING WALLS 75 MM THICK FIRE RESISTANT CONCRETE

EXTERNAL BUILDING AREA = 84.6 SQM  
 STAIRS AREA = 3.4 SQM  
 ACCOMMODATION PROPOSAL  
 STEPHEN & DAUAN ISLANDS

9334

COPYRIGHT UNIBUILD  
 www.unibuild.com